

# SMART OFFICE CHAIR WITH RASPBERRY PI INTEGRATION

<sup>1</sup>Dr. K V Ram Prasad, <sup>2</sup>B Swetha, <sup>3</sup>P.Venkatramulu

<sup>1,2,3</sup>Assistant Professor

Department Of ECE

Visvesvaraya College Of Engineering & Technology, Ibrahimpatnam, Telangana

## ABSTRACT

Longer hours are spent sitting in offices pertaining to software, working professors at schools, universities, etc. This has led to a growing number of health problems for them, including obesity, joint discomfort, back pain, and other ailments.

The "Intelligent Office Chair" project was created as a solution to this. If a person sits on this chair for an extended period of time, it provides instructions. Additionally, you may use the app to change the height of this chair.

A prototype module is created with a Raspberry Pi to demonstrate the idea in practice. We can change the height and set a siren to alert the user when they are sitting for longer than usual so they may take a short break by using the IP address. If the user is not seated correctly, an ultrasonic sensor is also used to provide instructions.

The chair uses sensors to monitor several factors, such as an infrared sensor to identify obstacles and an ultrasonic sensor to evaluate a person's posture distance.

The Raspberry Pi, the most demanding technology, was used in the creation of this project. According to preliminary findings, the Chair and the case study smartphone application can precisely identify the parameters and provide information or indications via the output devices, such as vibrators.

IP addresses are important to our project as they allowed us to construct it. Relay aids in our ability to detect vibrations.

## I. INTRODUCTION

### I.1 INTRODUCTION OF PROJECT:


Recently, various systems and applications utilizing IoT technology have been developed to help people in addressing issues that occur in our everyday life. Most people today spend more than half of the day on chairs for various purposes such as studying, driving, or working. For this reason, modern people are afflicted with waist disease such as lumbar disc, hip twisting and scoliosis, which rarely occurred in the past. For this reason, many hospitals which specialize in treating spines have been established nowadays.

In this project work, a Smart IoT Chair which supplements the limitations like sitting properly, taking breaks, drinking water, etc makes users sit correctly with recognition of their own current state by providing intuitive and visualized data in real time to Smartphone application. We can decrease back and hip pain caused by sitting for a long time through dispersing the pressure on the back and hip by dimidiating correcting posture of a person sitting on the chair. The focus is on ease of use, and

allowing simple data connections with little programming required. The Smart IoT Chair implemented by this study can be used in various fields. First application area that we are targeting is in games for leisure or for posture calibration. With these games, the goal would be to correct user's posture while enjoying games by directing appropriate sitting position opposite to the user's usual habit based on collected data.

In addition, it can analyze sitting pattern of each individual and stimulus such as vibration or sound. Furthermore, other Smart devices can also be created by combining other furniture with this IoT device. (e.g., a bed which analyzes sleeping pattern, a sofa or kitchen chair that provides custom services). As an immediate future work, we plan to precisely quantify the sensing ranges of our custom designed sensors, conduct thorough evaluation, deploy the chairs at a larger scale, and employ a gateway to collect posture data from large number of chairs make the project work more realistic, much importance is given for practical orientation, therefore a prototype module is constructed for the demonstration purpose. This module simulates the real working system and based on this technology with slight changes in the structure and motor ratings, the chair can be constructed for real applications. The chair is constructed with electronics, electrical & mechanical components.

### 1.2 BLOCK DIAGRAM:

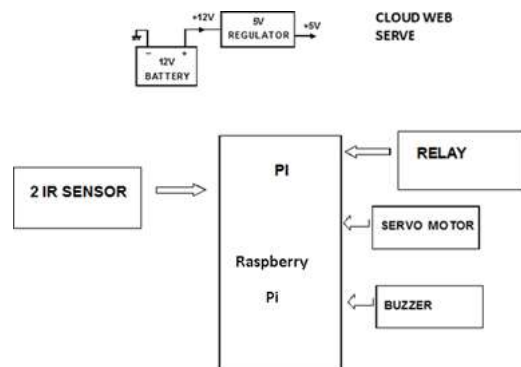

### 1.3 EXPLANATION OF EACH BLOCK:

#### 1.3.1 FUNCTIONAL

The functional description of the project work "Intelligent Office Chair" is explained in this chapter. For better understanding, the total module is divided into various blocks and each block explanation is provided here. The diagrams (block diagram and circuit diagram) of this project work are provided

in the next chapter. The following is the description of the over all function or operation of the project work.

#### 1.4 RASPBERRY PI:

##### Why Raspberry Pi Pico?



Fig 1. Raspberry Pi Pico

A Raspberry Pi Pico is a low-cost microcontroller device. Microcontrollers are tiny computers, but they tend to lack large volume storage and peripheral devices that you can plug in (for example, keyboards or monitors).

A Raspberry Pi Pico has GPIO pins, much like a Raspberry Pi computer, which means it can be used to control and receive input from a variety of electronic devices.

Raspberry Pi refers to a series of small single-board computers developed in the United Kingdom by the Raspberry Pi Foundation in association with Broadcom. The boards have been made keeping in mind the promotion of teaching basic computer science to kids. The latest offering by Raspberry Pi is the Raspberry

it is a microcontroller board built on silicon and designed at the Raspberry Pi Foundation.

#### 1.5 OBSTACLE SENSING CIRCUIT DESIGNED USING IR SENSORS

The main block in the project is the Obstacle Sensing circuit Designed with IR Sensors that are arranged on the chair to sense whether the person has sit or not. The obstacle-sensing block is designed with LM567 IC, this is a tone decoder IC, and also it generates tone frequency. For identifying the obstacles, a set of sensors are used with a 567 IC. The obstacle sensing block is designed with infrared sensors; a set of IR sensors are used as IR signal transmitting LED and IR signal receiving LED. These sensors are arranged side by side and are mounted on the walking stick. Both the sensors are wired with IC 567, this is a tone frequency generator cum decoder IC, means this IC can produce a tone frequency of up to 20 KHz, and the same IC also can decode the frequency. Since this IC can perform two different functions, the IR signal transmitting LED is connected at the output of tone signal generating part of IC, similarly the IR signal receiving LED is connected at the output of tone signal decoding part of IC. The tone signal generating part is configured as free running oscillator, with the help of a resistor and capacitor connected externally to this oscillator frequency can be adjusted. When the circuit is energized it starts producing a continuous chain of square pulses. The output of this oscillator is amplified and fed to IR

LED. This LED radiates the signal in to air and depending up on the signal strength or radiating power, the range can be increased. The IR signal delivered from the IR LED transmitted in a line like a laser beam, this beam is invisible and harmless. When the transmitted laser beam interrupted by any obstacle, this beam will be disturbed by the object and some of the signal will be reflected, this reflected signal will be received by the receiver infrared LED. The output of IR-Receiver is (proportional to reflected wave) found for matching (comparing) with that of transmitted wave, and then the output of the IC will becomes low automatically (If both are equal then output of this IC becomes low). The output of this tone decoder IC is fed to microcontroller.

The basic function of the detector circuit is by radiating energy into space through IR LED and detecting the echo signal reflected from an object. The reflected energy that is returned to the IR sensor indicates the presence of a object which



Fig .2: IR Sensor

An infrared sensor is an electronic instrument that is used to sense certain characteristics of its surroundings by either emitting and/or detecting infrared radiation. It is also capable of measuring heat of an object and detecting motion. Infrared waves are not visible to the human eye. In the electromagnetic spectrum, infrared radiation is the region having wavelengths longer than visible light wavelengths, but shorter than microwaves. The infrared region is approximately demarcated from 0.75 to 1000µm. IR (infrared) sensors detect infrared light. The IR light is transformed into an electric current, and this is detected by a voltage or amperage detector.

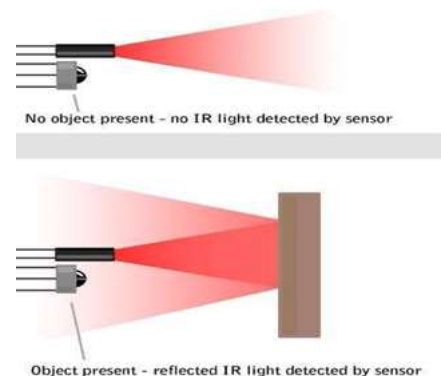


Fig .3: IR

### 1.6 ULTRASONIC SENSOR:

Ultrasonic sensors work on a principle similar to radar or sonar which evaluates attributes of a target by interpreting the echoes from radio or sound waves respectively. Ultrasonic sensors generate high frequency sound waves and evaluate the echo which is received back by the sensor. Sensors calculate the time interval between sending the signal and receiving the echo to determine the distance to an object. This technology can be used for measuring: wind speed and direction (anemometer), fullness of a tank and speed through air or water. Further applications include: humidifiers, sonar, medical ultra pornography, burglar alarms and non-destructive testing. Systems typically use a transducer which generates sound waves in the ultrasonic range, above 20,000 hertz, by turning electrical energy into sound, then upon receiving the echo turn the sound waves into electrical energy which can be measured and displayed.

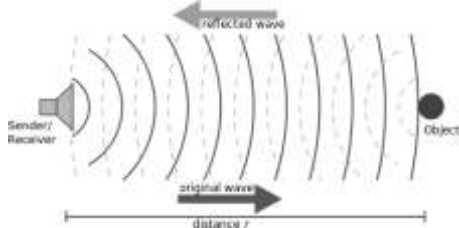


Fig .4: Ultrasonic Distance Measurement

### SERVOMOTOR:

A servo motor is a type of motor that can rotate with great precision. Normally this type of motor consists of a control circuit that provides feedback on the current position of the motor shaft, this feedback allows the servo motors to rotate with great precision. If you want to rotate an object at some specific angles or distance, then you use a servo motor. It is just made up of a simple motor which runs through a servo mechanism. If motor is powered by a DC power supply then it is called DC servo motor, and if it is AC-powered motor then it is called AC servo motor. For this tutorial, we will be discussing only about the DC servo motor working. Apart from these major classifications, there are many other types of servo motors based on the type of gear arrangement and operating characteristics. A servo motor usually comes with a gear arrangement that allows us to get a very high torque servo motor in small and lightweight packages. Due to these features, they are being used in many applications like toy car, RC helicopters and planes, Robotics, etc.

Servo motors are rated in kg/cm (kilogram per centimeter) most hobby servo motors are rated at 3kg/cm or 6kg/cm or 12kg/cm. This kg/cm tells you how much weight your servo motor can lift at a particular distance. For example: A 6kg/cm Servo motor should be able to lift 6kg if the load is

suspended 1cm away from the motors shaft, the greater the distance the lesser the weight carrying capacity. The position of a servo motor is decided by electrical pulse and its circuitry is placed beside the motor.

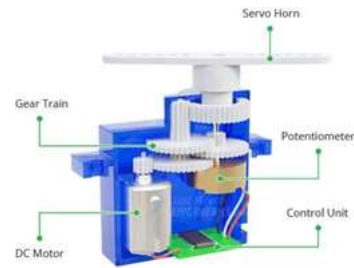


Fig .5: Servomotor

### BUZZER:

The buzzer is a sounding device that can convert audio signals into sound signals. It is usually powered by DC voltage. It is widely used in alarms, computers, printers and other electronic products as sound devices. It is mainly divided into piezoelectric buzzer and electromagnetic buzzer, represented by the letter "H" or "HA" in the circuit. According to different designs and uses, the buzzer can emit various sounds such as music, siren, buzzer, alarm, and electric bell.



Fig .6 Buzzer

## II. LITERATURE SURVEY

### 1.Ergonomic Design of Smart Office Chairs

- Goh, Y. M., & Nagayama, Y. (2019). Development of a Smart Office Chair with Ergonomic Features. Proceedings of the 20th Congress of the International Ergonomics Association.
- Al-Jumaily, A. A., & Lutteroth, C. (2019). Smart Chair for Ergonomic Workplace Monitoring and Intervention. 2019 IEEE International Conference on Systems, Man and Cybernetics (SMC).
- Chen, C. Y., & Cheng, F. T. (2017). Ergonomics Design of Smart Office Chair based on Fuzzy System and RFID Technique. Procedia Manufacturing, 10, 790-797.

### 2.Health Monitoring and Well-being in Smart Office Chairs

- Chatzakis, E., Soudris, D., & Andrikopoulos, G. (2018). A Smart




Chair for Posture Monitoring. 2018 IEEE International Conference on Industrial Technology (ICIT).

- Chalamala, B. R., & Waghmare, L. M. (2020). IoT Enabled Smart Office Chair for Health Monitoring. 2020 IEEE Region 10 Symposium (TENSYMP).
- Hwang, W., & Woo, S. (2020). Development of a Smart Office Chair for Stress Reduction using EEG-based Biosignals and Seat Vibration. International Journal of Precision Engineering and Manufacturing-Green Technology, 7(5), 1139-1147.
- 3.Connectivity and Automation in Smart Office Chairs
- Goli-Malekabadi, Z., & Barreto, A. (2019). A Smart Office Chair for Energy Conservation in Buildings. 2019 IEEE International Symposium on Technology and Society (ISTAS).
- Ho, T. K., & Ng, C. H. (2018). A Smart Chair with Sensor Networks for Office Automation. 2018 15th IEEE Annual Consumer Communications & Networking Conference (CCNC).
- Sathyanarayanan, S., Sridhar, L., & Jain, S. (2020). Smart Office Chair with Gesture Recognition and IoT Integration. 2020 International Conference on Electronics and Sustainable.

### III. CIRCUIT CONNECTIONS AND RESULTS

#### 3.1CIRCUIT DIAGRAM:

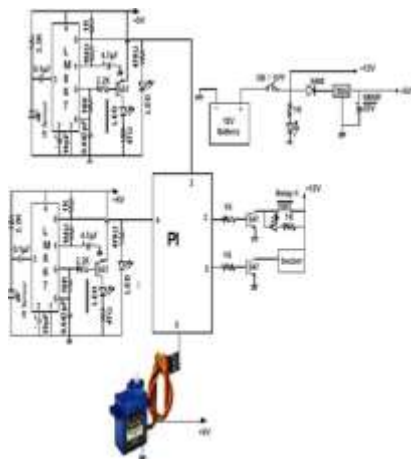

#### 3.2 Result of Our Project:


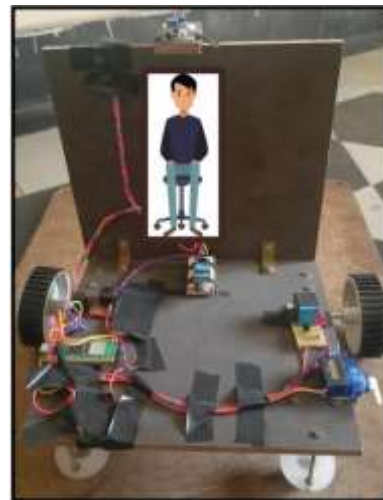


Fig 7. Without Power Supply

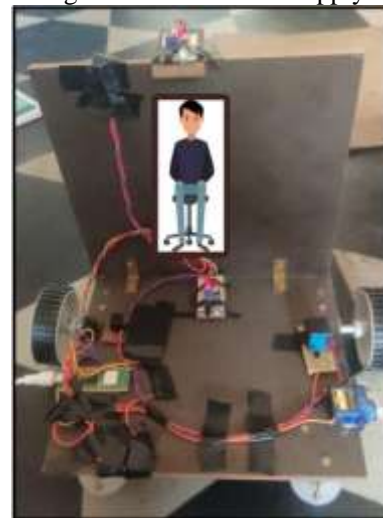

### IV. CONCLUSION AND FUTURE SCOPE CONCLUSION:

The "Intelligent Office Chair" project work has been successfully created and developed. A prototype module is built for demonstration purposes, and the outcomes are deemed acceptable. As a prototype module, a basic module that may be applied to several remote applications is built. We engaged a few specialists throughout the design and development of this prototype module. These professionals, who work for several Hyderabad-based firms, assisted us in creating this module. Since it is a prototype module, not much money has been committed, and the whole module is built using readily accessible, subpar local components. A few design adjustments are necessary in order to turn the concept into a functional system. This research demonstrated how to develop a voice announcement system and chair with excellent accuracy at a reasonably cheap cost. Preparing the software to carry out the duties based on the inputs is the main and crucial duty. The software (code) that we specify for the Raspberry Pi is the only thing that affects the machine's

performance. The technology used here is solely for creating the prototype module; more development is required to turn it into a functional system.

#### **FUTURE SCOPE:**

A camera is added to the Raspberry Pi, allowing us to recognize things and people. We are able to remotely operate robots equipped with cloud interfaces thanks to live streaming. Additionally, we can develop an application interface that is controllable from any location with a wifi connection by using a wifi module to establish the interface. further to include sensors for object detection and collision avoidance, such as infrared and ultrasonic.

#### **REFERENCES**

1. R.Rajalakshmi.,“[https://www.ijrpr.com/uploads/V2ISSUE4/IJ\\_RPR324.pdf](https://www.ijrpr.com/uploads/V2ISSUE4/IJ_RPR324.pdf)”,2021.
2. Neha Sachdev,, “Bluetooth control Bot Car to BE used by Healthcare Workers to support Corona Patient”, 2021.
3. MSaravanan,“<https://iopscience.iop.org/article/10.1088/1757-899X/993/1/012125/pdf>“.2020.
4. N.AyushUbale.,“<https://www.ijeast.com/papers/160-170,Tesma604,IJEAST.pdf>”,2020.
5. ShubhSrivastava,“[https://www.irjet.net/archives/V7/i5/IRJET\\_V7I5770.pdf](https://www.irjet.net/archives/V7/i5/IRJET_V7I5770.pdf)“,2020
6. AbdulNaeemKhan,“[https://www.researchgate.net/publication/329919803\\_Implementation\\_of\\_VoiceControlled\\_Robotic\\_Vehicle\\_withAutomatic\\_Braking\\_and\\_Obstacle\\_Avoidance](https://www.researchgate.net/publication/329919803_Implementation_of_VoiceControlled_Robotic_Vehicle_withAutomatic_Braking_and_Obstacle_Avoidance)”,2018.
7. Pallavi Raj et. al., “Simulation and Performance Analysis of Feature Extraction and Matching Algorithms for Image Processing Applications' IEEE International Conference on Intelligent Sustainable Systems,2019.
8. Mohana et.al., “Simulation of Object Detection Algorithms for Video Surveillance Applications”,International Conference on I-SMAC (IoT in Social, Mobile, Analytics and Cloud),2018.
9. Yojan Chitkara et. al., “Background Modeling techniques for foreground detection and Tracking using Gaussian Mixture model” International Conference on Computing Methodologies and Communication,2019.
10. Rubner et.al, “A metric for distributions with applications to image databases”, International Conference on Computer Vision, 2016.